



ONDA

The swaying of the flames on the logs inspired the shape of this graceful stove, which takes up, in its name, the movement of its base and its walls. The upper dome accentuates the rounded shapes that characterize this small-sized stove.

It is equipped with a 'Gran Fuoco' door, to facilitate the introduction of wood.

It can be equipped with a CARTER FOR EXTERNAL AIR INTAKE.


MODELS AND SIZES

CLASSICHE WOOD



INSTALLATION

Measurements in **cm**

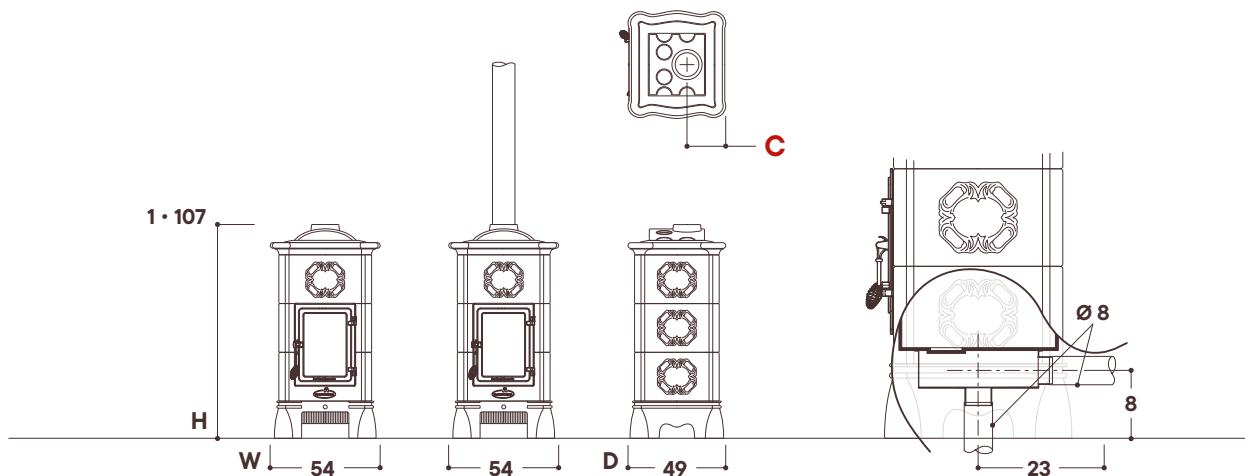

SIZE

1

C	<i>cm</i>	19
----------	-----------	----

CLEARANCES FROM FLAMMABLE MATERIALS

Side: 20 cm
Rear: 20 cm
Front (combustion chamber door): 100 cm

INSTALLATION NOTES

- » The installations must be made in accordance with UNI 10683 (in Italy) or according to the regulations in force in the country where the stove is installed.
- » In the case of a rear smoke outlet with exposed pipe and flammable material near the stove, it is essential to use a double-walled pipe at least 10 cm away from all flammables.

TECHNICAL DATA

SIZE

1

Heat Output *	kW	6
Min-Max Heat Output	kW	3 - 7
Heating Capacity	<i>m</i> ³	85 - 200
Efficiency	%	77
Carbon Monoxide Emission · % Co 13% O ₂	%	0,06
Dust · 13% O ₂	<i>mg/Nm</i> ³	30
Wood Consumption	<i>Kg/h</i>	1,8
Smoke Temperature	°C	250
Flue Pipe Diameter	<i>cm</i>	12
Draft	<i>Pa</i>	11
Total Weight	<i>Kg</i>	170
Measurements (w x d x h)	<i>cm</i>	54 x 49 x 107
Energy Efficiency		A

* Complies UNI EN-13240, DEUTSCHLAND BlmSchV 2

CERTIFICATIONS

CE UNI EN-13240

15a B-VG 

BlmSchV 2 

