CUBISTACK WOOD

The simple lines make it suitable for a modern environment. Equipped with a Gran Fuoco door and oak base.

Available in 2 sizes and also in thermo-stove version (ThermoStack).

It can be equipped with a CARTER FOR EXTERNAL AIR INTAKE.

MODELS AND SIZES

1 2

INSTALLATION

Measurements in **cm**

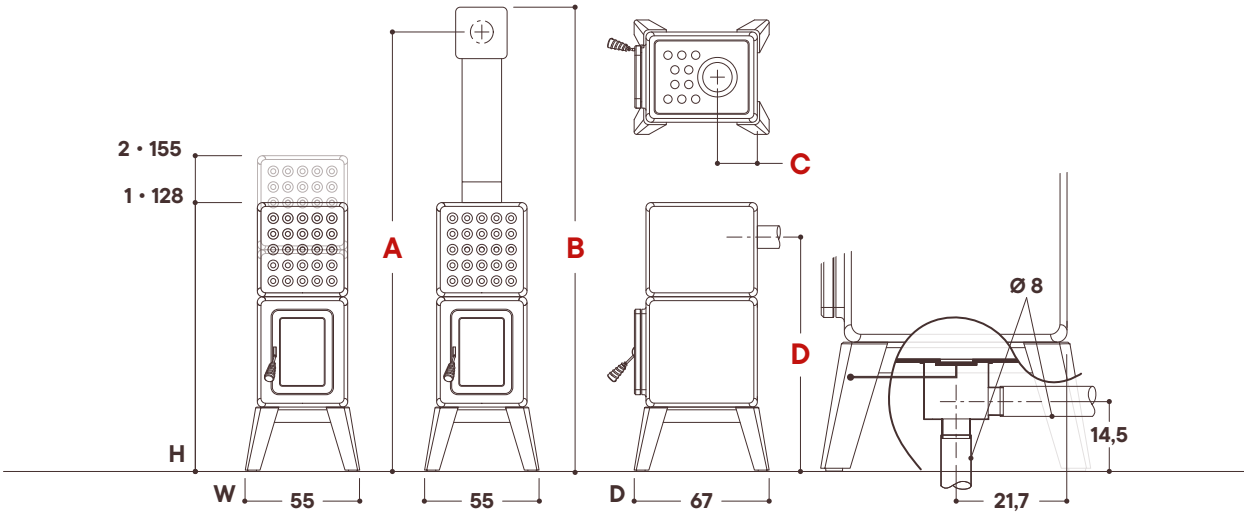

SIZE			1	2
With Ceramic Column h 90 cm	A	*cm*	231	257
	B	*cm*	244	270
	C	*cm*	25	25
	D	*cm*	106	133

STACK

CLEARANCES FROM FLAMMABLE MATERIALS

Side: 40 cm
Rear: 20 cm
Front (combustion chamber door): 150 cm

INSTALLATION NOTES

- The installations must be made in accordance with UNI 10683 (in Italy) or according to the regulations in force in the country where the stove is installed.
- In the case of a rear smoke outlet with exposed pipe and flammable material near the stove, it is essential to use a double-walled pipe at least 10 cm away from all flammables.

CERTIFICATIONS

CE UNI EN-13240

15a B-VG

BImSchV 2

TECHNICAL DATA

SIZE		1
Heat Output *	*kW*	7,5
Min-Max Heat Output	*kW*	4 - 9
Heating Capacity	*m^3*	100 - 260
Efficiency	*%*	81
Carbon Monoxide Emission · % Co 13% O_2	*%*	0,1
Dust · 13% O_2	*mg/Nm^3*	24
Wood Consumption	*Kg/h*	2,2
Smoke Temperature	*°C*	204
Flue Pipe Diameter	*cm*	15
Draft	*Pa*	12
Total Weight	*Kg*	300
Ceramic Column Weight	*Kg*	25
Measurements (w x d x h)	*cm*	55 x 67 x 128
Energy Efficiency		A +

* *Complies UNI EN-13240, DEUTSCHLAND BImSchV 2*

TECHNICAL DATA WITH CATALYTIC FILTER

SIZE		1	2
Heat Output *	*kW*	7	7,5
Efficiency	*%*	88	88
Carbon Monoxide Emission · % Co 13% O_2	*%*	0,0281	0,0265
Dust · 13% O_2	*mg/Nm^3*	10	9,4
Wood Consumption	*Kg/h*	1,903	2,024
Smoke Temperature	*°C*	171,1	164,1
Flue Pipe Diameter	*cm*	15	15
Draft	*Pa*	10	10
Total Weight	*Kg*	300	350
Ceramic Column Weight	*Kg*	25	25
Measurements (w x d x h)	*cm*	55 x 67 x 128	55 x 67 x 155
Energy Efficiency		A +	A +

* *Complies UNI EN-13240, DEUTSCHLAND BImSchV 2*

The stove can have higher performances, in terms of kW, up to a maximum heatable volume of 340 m^3, in the largest size, with medium insulation.

FILTER DATA SHEET

Measurements in **cm**

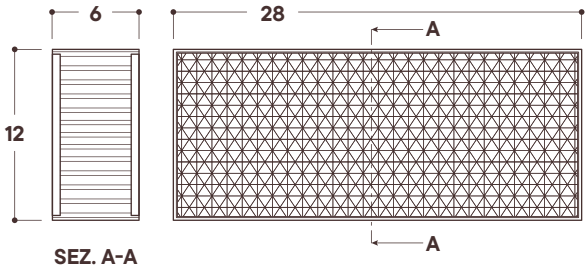

CODE: CAT 27/12-6

Description: catalytic converter
Shape: parallelepiped
Measurements (w x d x h): 28 x 12 x 6 cm
Material: refractory steel with impregnation
Operating temperature: - 20 °C / + 800 °C
Melting temperature: 1.400 °C

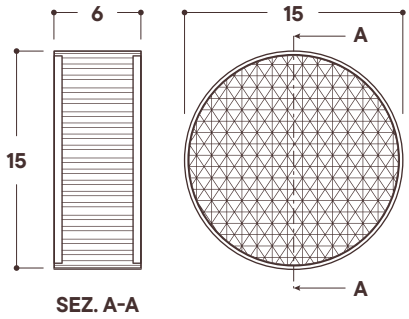

CODE: CAT 15/60

Description: catalytic converter
Shape: round
Measurements (d x h): 15 x 6 cm
Material: refractory steel with impregnation
Operating temperature: -20 °C / + 800 °C
Melting temperature: 1.400 °C

CATALYTIC FILTER POSITION

Measurements in **cm**

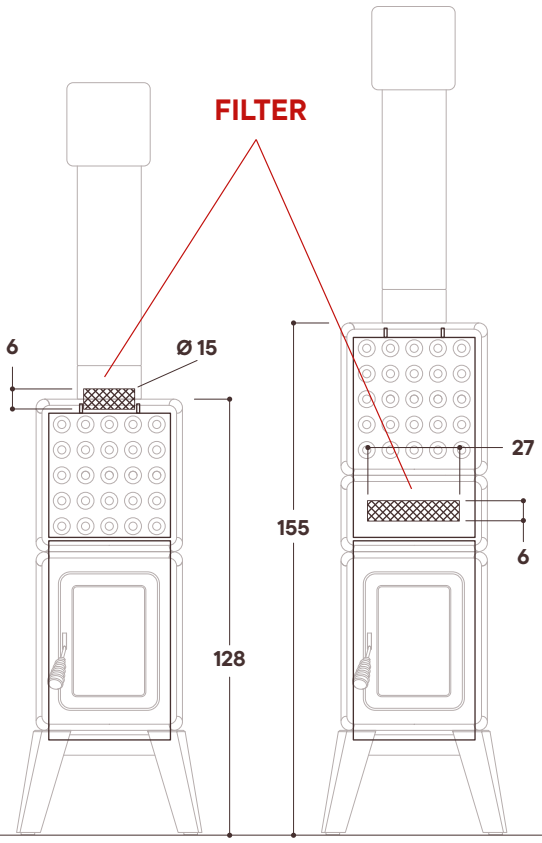

1 2