



MINISTACK

Smaller in size than RoundStack and CubiStack but with 6 kW of power, MiniStack is a flagship of our production.

Equipped with a 'Gran Fuoco' door and wooden base.

It can be equipped with a CARTER FOR EXTERNAL AIR INTAKE.


MODELS AND SIZES



1

INSTALLATION

Measurements in **cm**

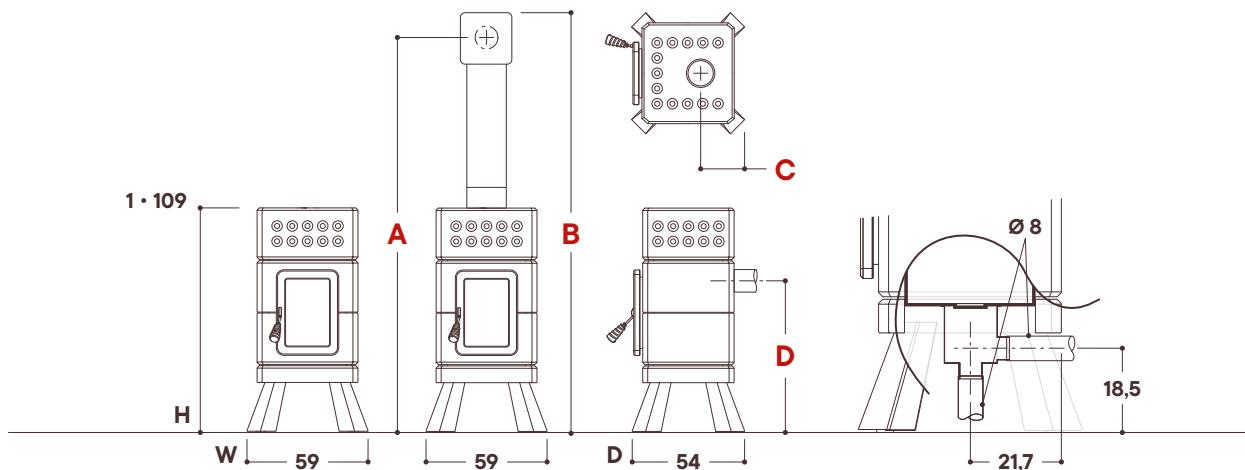

SIZE

With Ceramic Column h 90 cm

	1
A	cm 212
B	cm 224
C	cm 16
D	cm 83

STACK

CLEARANCES FROM FLAMMABLE MATERIALS

Side: 20 cm
Rear: 20 cm
Front (combustion chamber door): 100 cm

INSTALLATION NOTES

- » The installations must be made in accordance with UNI 10683 (in Italy) or according to the regulations in force in the country where the stove is installed.
- » In the case of a rear smoke outlet with exposed pipe and flammable material near the stove, it is essential to use a double-walled pipe at least 10 cm away from all flammables.

TECHNICAL DATA

SIZE

		1
Heat Output *	kW	6
Min-Max Heat Output	kW	3 - 7
Heating Capacity	m^3	85 - 200
Efficiency	%	77
Carbon Monoxide Emission · % Co 13% O ₂	%	0,06
Dust · 13% O ₂	mg/Nm^3	30
Wood Consumption	Kg/h	1,8
Smoke Temperature	°C	250
Flue Pipe Diameter	cm	15
Draft	Pa	11
Total Weight	Kg	170
Ceramic Column Weight	Kg	25
Measurements (w x d x h)	cm	59 x 54 x 109
Energy Efficiency		A

* Complies UNI EN-13240, DEUTSCHLAND BlmSchV 2

CERTIFICATIONS

CE UNI EN-13240

15a B-VG 

BlmSchV 2 

